

TWO-STAGE SNOWBLOWERS

	POWER MAX®			POWER MAX® HD			
	724 OE 37775	826 OE 37772	826 OTE 37777	826 OXE 38800	928 OHXE 38801	1028 OHXE 38802	1128 OHXE 38803
Capacity / Minute*	Up to 1800 lbs. / 818 kg	▶ Up to 1900 lbs. / 864 kg	Up to 1900 lbs. / 864 kg	▶ Up to 1900 lbs. / 864 kg	Up to 1900 lbs. / 864 kg	▶ Up to 2100 lbs. / 955 kg	▶ Up to 2200 lbs. / 1000 kg
Throw Distance*	Up to 40' / 12 m	Up to 40' / 12 m	Up to 40' / 12 m	▶ Up to 45' / 13.5 m	Up to 45' / 13.5 m	Up to 45' / 13.5 m	Up to 45' / 13.5 m
Clearing Width	24"	▶ 26"	26"	26"	▶ 28"	▶ 28"	28"
Power Steering	N/A	N/A	N/A	▶ Standard	Standard	Standard	Standard
Speeds	6 Fwd. / 2 Rev.	6 Fwd. / 2 Rev.	6 Fwd. / 2 Rev.	6 Fwd. / 2 Rev.	6 Fwd. / 2 Rev.	6 Fwd. / 2 Rev.	6 Fwd. / 2 Rev.
Snow Cut Depth – 1 Pass	20"	20"	20"	▶ 21.5"	21.5"	21.5"	21.5"
Auger System	Anti-Clogging System (ACS)	Anti-Clogging System (ACS)	Anti-Clogging System (ACS)	Anti-Clogging System (ACS)	Anti-Clogging System (ACS)	Anti-Clogging System (ACS)	Anti-Clogging System (ACS)
Auger Diameter	11"	11"	11"	▶ 14"	14"	14"	14"
Auger Gearbox	Hardened Gears	Hardened Gears	Hardened Gears	Commercial-Grade; No shear pins needed	Commercial-Grade; No shear pins needed	Commercial-Grade; No shear pins needed	Commercial-Grade; No shear pins needed
Engine	205cc B&S OHV 4-cycle	▶ 250cc B&S OHV 4-cycle	250cc B&S OHV 4-cycle	250cc B&S OHV 4-cycle	▶ 265cc Toro Premium OHV 4-cycle	▶ 302cc Toro Premium OHV 4-cycle	▶ 342cc B&S OHV 4-cycle
Starter	Electric Start	Electric Start	Electric Start	Electric Start	Electric Start	Electric Start	Electric Start
Fuel Capacity	3.2 Quarts / 3 L	3.2 Quarts / 3 L	3.2 Quarts / 3 L	▶ 3.4 Quarts / 3.2 L	3.4 Quarts / 3.2 L	3.4 Quarts / 3.2 L	3.2 Quarts / 3 L
Chute Control	Quick Stick	Quick Stick	Quick Stick	Quick Stick	Quick Stick	Quick Stick	Quick Stick
Skids	Standard	Standard	Standard	Standard	Standard	Standard	Standard
One-Hand Interlock	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Hand Warmers	N/A	N/A	N/A	N/A	▶ Standard	Standard	Standard
Scraper	Adjustable	Adjustable	Adjustable	Adjustable	Adjustable	Adjustable	▶ Pivoting
Tires	13"	13"	▶ 13" Xtrawide	▶ 16"	16"	16"	16"
Headlight	N/A	N/A	▶ Yes	Yes	Yes	Yes	Yes
Weight	172 lbs. / 78 kg	175 lbs. / 79 kg	176 lbs. / 79 kg	243 lbs. / 110 kg	262 lbs. / 119 kg	267 lbs. / 121 kg	269 lbs. / 122 kg
Storage Dimensions	56" x 27.8" x 43.5"	56" x 27.8" x 43.5"	56" x 27.8" x 43.5"	62" x 29.5" x 44.5"	62" x 29.5" x 44.5"	62" x 29.5" x 44.5"	62" x 29.5" x 44.5"
Machine Warranty**	3-Year Limited	3-Year Limited	3-Year Limited	3-Year Limited	3-Year Limited	3-Year Limited	3-Year Limited
Deflector, Bypass, Chute Warranty**	Guaranteed for Life	Guaranteed for Life	Guaranteed for Life	Guaranteed for Life	Guaranteed for Life	Guaranteed for Life	Guaranteed for Life

PERFORMANCE

ENGINE

USER-FRIENDLY FEATURES

▶ = Enhance or step-up feature.



ANTI-CLOG SYSTEM (ACS)
Prevents clogging and maximizes impeller speed and snowblowing velocity.



MAXIMUM STRENGTH
The unique one-piece frame offers maximum strength for years of dependable use.



QUICK STICK® CHUTE CONTROL
An innovative joystick control allows you to change the chute direction quickly and easily, even on the go.




SUB ZERO MATERIAL
The chute, deflector, and ACS are made out of a special cold-weather material durable to -104°F. Guaranteed for Life*.



HAND WARMERS
Keep warm in subzero temperatures for added comfort.



FREEWHEEL POWER STEERING
Handle-mounted triggers allow you to disengage one or both wheels for effortless maneuverability.

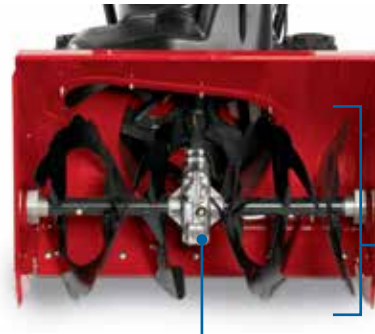

14" SERRATED AUGER
Extra-large auger designed to chew through even the toughest snow.

COMMERCIAL-GRADE GEARBOX
Unlike others, this gearbox is tough enough not to need shear pins so you never need to worry about replacing them.

POWER MAX†

POWER MAX HD†

