




ProCore® SR Series deep-tine aerators

FEATURES

- Multiple high-performance units for a wide variety of aeration applications
- Aeration widths of 122 cm - 190,5 cm (48-75")
- Aeration depths of up to 40.6 cm (16")
- Hydraulic remote depth adjustment – no need to get off the tractor to change depths
- Solid and coring tines available for your specific aeration application

The deep tine difference.

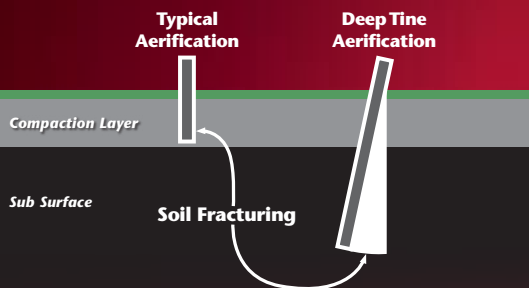


Deep-tine aeration relieves soil compaction at lower soil levels than typical aeration. The tines fracture the soil creating channels through the root zone allowing oxygen, water and critical nutrients to penetrate deep into the soil profile.

Reduce soil compaction for healthier turf.

ProCore SR Series deep-tine aerators offer a variety of solutions to alleviate subsurface soil compaction on greens, fairways, sports fields, parks and many other areas. These durable and time-tested products are capable of withstanding the most extreme aeration conditions. The ProCore SR Series aerators also have hydraulic remote depth adjustment, which allows the operator to change depths without getting off the tractor, resulting in increased operator productivity.

From lightweight, precision machines for smoother, softer greens to robust, heavy-duty machines to break up soil on even the most compacted surfaces, the ProCore SR Series deep-tine aerators are the ultimate choice for performance and quality.

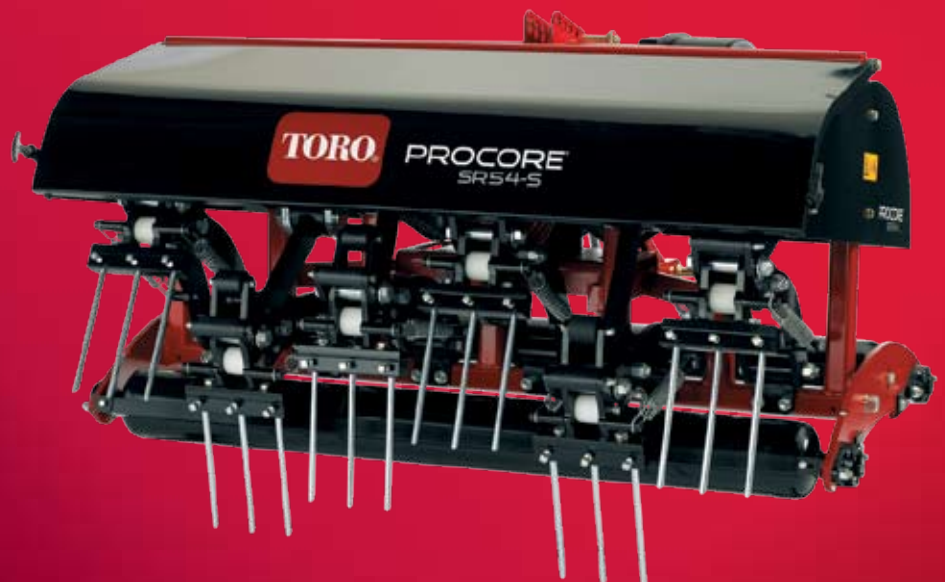

ProCore® SR Series Specifications*



	PROCORE SR48**	PROCORE SR54	PROCORE SR54-S	PROCORE SR70	PROCORE SR70-S	PROCORE SR72	PROCORE SR75-HD**
WEIGHT WITH PTO & TOP LINK	655 kg (1,450 lbs.)	450 kg (990 lbs.)	567 kg (1,250 lbs.)	681 kg (1,500 lbs.)	750 kg (1,655 lbs.)	900 kg (1,985 lbs.)	1,475 kg (3,250 lbs.)
WORKING WIDTH	1.22 m (48")	1.37 m (54")	1.37 m (54")	1.85 m (73")	1.85 m (73")	1.83 m (72")	1.98 m (78")
WORKING DEPTH (ADJUSTABLE)	75-300 mm (1" - 14")	25-250 mm (1" - 10")	25-250 mm (1" - 10")	25-250 mm (1" - 10")	25-250 mm (1" - 10")	25-400 mm (1" - 16")	25-400 mm (1" - 16")
HOLE SPACING	75-150 mm (3" - 6")	64-102 mm (2.5" - 4")	64-102 mm (2.5" - 4")	64-102 mm (2.5" - 4")	64-102 mm (2.5" - 4")	75-150 mm (3" - 6")	75-150 mm (3" - 6")
PRODUCTIVITY	2,325 m ² /h (25,000 ft ² /h)	3,345 m ² /h (36,000 ft ² /h)	3,345 m ² /h (36,000 ft ² /h)	4,460 m ² /h (48,000 ft ² /h)	4,460 m ² /h (48,000 ft ² /h)	3,530 m ² /h (38,000 ft ² /h)	4,460 m ² /h (48,000 ft ² /h)
RECOMMENDED TRACTOR SIZE	18.6 kW (25 hp)	11.9-13.4 kW (16-18 hp)	13.4 kW (18 hp)	18.6-26.1 kW (25-35 hp)	18.6-26.1 kW (25-35 hp)	33.6 kW (45 hp)	41.0+ kW (55+ hp)
RECOMMENDED LIFT CAPACITY	817 kg (1,800 lbs.)	682 kg (1,200 lbs.)	682 kg (1,500 lbs.)	773 kg (1,700 lbs.)	817 kg (1,800 lbs.)	1,270 kg (2,800 lbs.)	1,815 kg (4,000 lbs.)
RECOMMENDED COUNTER WEIGHT	135 kg (300 lbs.)	70 kg (150 lbs.)	70 kg (150 lbs.)	115 kg (250 lbs.)	115 kg (250 lbs.)	135-225 kg (300-500 lbs.)	315-410 kg (700-900 lbs.)
RECOMMENDED PTO SPEED	400-500 rpm	400-500 rpm	400-500 rpm	400-500 rpm	400-500 rpm	400-500 rpm	400-500 rpm
ACTUAL WORKING SPEED @ 400 PTO RPM (VARIES WITH HOLE SPACING)	.13-2.1 km/h (.08-1.3 mph)	2.4-4.0 km/h (1.5-2.5 mph)	2.4-4.0 km/h (1.5-2.5 mph)	2.4-4.0 km/h (1.5-2.5 mph)	2.4-4.0 km/h (1.5-2.5 mph)	.13-2.4 km/h (.08-1.5 mph)	.13-2.4 km/h (.08-1.5 mph)
LIFT SYSTEM	Std. 3-point	Std. 3-point	Std. 3-point	Std. 3-point	Std. 3-point	Std. 3-point	Std. 3-point
CERTIFICATION	ANSI B71.4-1999, CE and EU machinery directives						
WARRANTY	Two-year limited warranty. Refer to Operator's Manual for further details						

*Specifications subject to change. Please contact your Toro distributor for details.

**ProCore SR48 and SR75-HD will be available Fall 2009.

Specifications subject to change. Please contact your Toro distributor for details.

©2009 The Toro Company
 8111 Lyndale Ave. S.
 Bloomington, MN 55420-1196
 Printed in the U.S.A.
 GB Part No. 200-4227